
Guidewire

PTFE GUIDE WIRE UNCOATED GUIDE WIRE

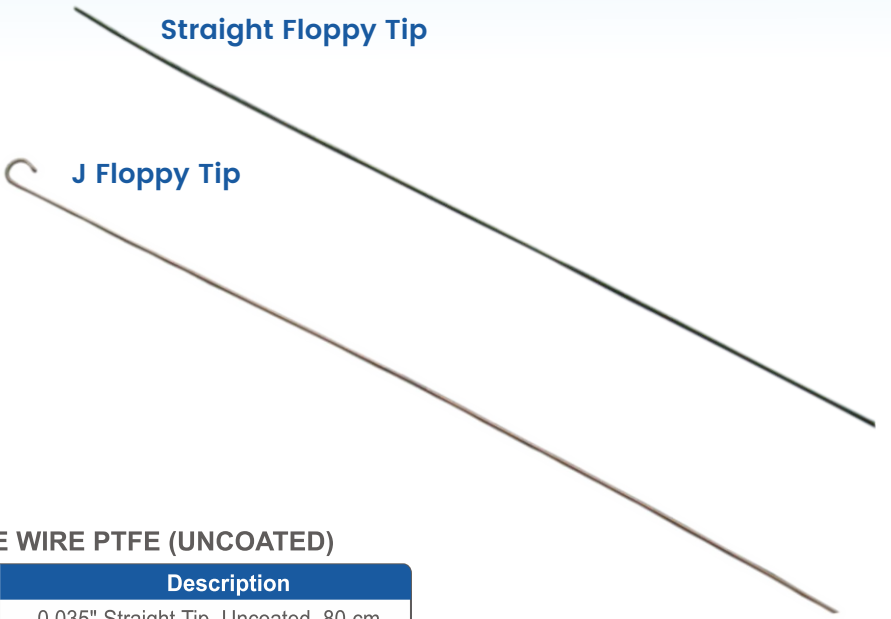

GUIDE WIRE PTFE (UNCOATED)

Order No.	Description
GWS 80-35	0.035" Straight Tip, Uncoated, 80 cm
GWS 80-38	0.038" Straight Tip, Uncoated, 80 cm
GWJ 80-35	0.035" J Tip, 3 mm Uncoated, 80 cm
GWJ 80-38	0.038" J Tip, 3 mm, Uncoated, 80 cm

GUIDE WIRE PTFE COATED

Order No.	Description
GWS 150-25	0.025" Straight Tip, PTFE Coated, 150 cm
GWS 150-28	0.028" Straight Tip, PTFE Coated, 150 cm
GWS 150-32	0.032" Straight Tip, PTFE Coated, 150 cm
GWS 150-35	0.035" Straight Tip, PTFE Coated, 150 cm
GWS 150-38	0.038" Straight Tip, PTFE Coated, 150 cm
GWJ 150-32	0.032" J Tip, 3 mm, PTFE Coated 150 cm
GWJ 150-35	0.035" J Tip, 3 mm, PTFE Coated 150 cm
GWJ 150-38	0.038" J Tip, 3 mm, PTFE Coated 150 cm

Indications

- Used for percutaneous entry into vessel using the seldinger technique or for endoscopic procedures.
- Stiff proximal shaft ensures pushability and control.
- Floppy distal tip enables precise, less traumatic advancement.
- Smooth, rounded ends and PTFE coating enables easy passage.